

Specifications

Eave height:

4.00m

Span width:

20.00m

Peak height:

10.20m

Ridge height:

7.25m

Bay distance:

5.00m

Roof pitch:

18°

Number of gable uprights:

3 Gable upright (per end)

Longest component:

10.70m

Minimum length:

20.00m

Maximum length:

Unlimited in 5.00m increments

Max allowed wind speed:

102 km/h (0.50kN/m²)

Main profile size:

220/100/4mm or 225/101/3.5/5.5mm (4-channel)

Eave connection type:

Aluminium Sliding

Aluminium type:

European - Hard Pressed Extruded Structural Aluminium


Connecting components:


European - hot dipped, structural grade corrosive resistant galvanised steel

Roof covering type:

Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.








Central America

Greece



Accessories

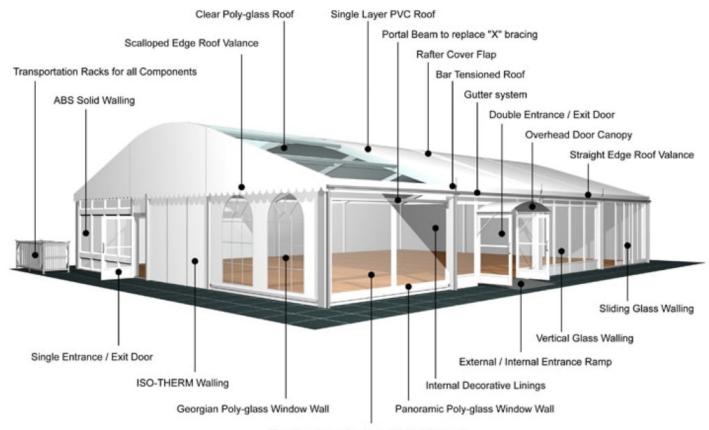

Steel Sub-frame Flooring with Timber Boards, Aluminium Cassette Flooring with Ply Boards or Heavy Duty Floor System

Central America

Greece