

Specifications

Eave height:
4.00m

Span width:
20.00m

Ridge height:
7.25m

Bay distance:
7.65m

Roof pitch:
18°

Longest component:
10.60m

Minimum length:
According to design

Maximum length:
Multiple configurations possible

Max allowed wind speed:
102 km/h (0.50kN/m²)




Main profile size:
220/100/4mm or 225/101/3.5/5.5mm (4-channel)

Eave connection type:
Twin Plate

Aluminium type:
European - Hard Pressed Extruded Structural Aluminium


Connecting components:
European - hot dipped, structural grade corrosive resistant galvanised steel

Roof covering type:
Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

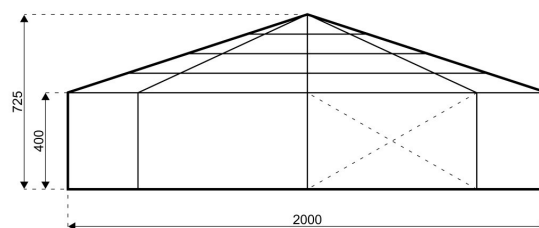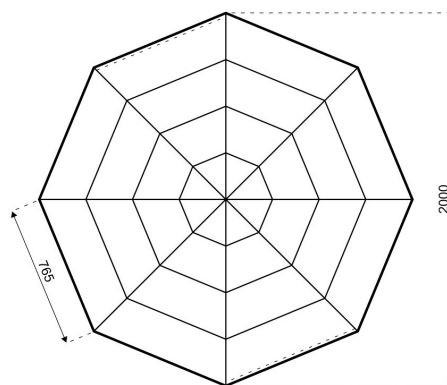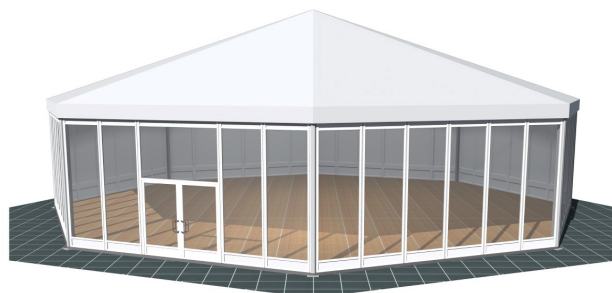

HTS tentiq disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet on this website. All product, product specification and data are subject to change without notice to improve reliability, function or design or otherwise.

Accessories

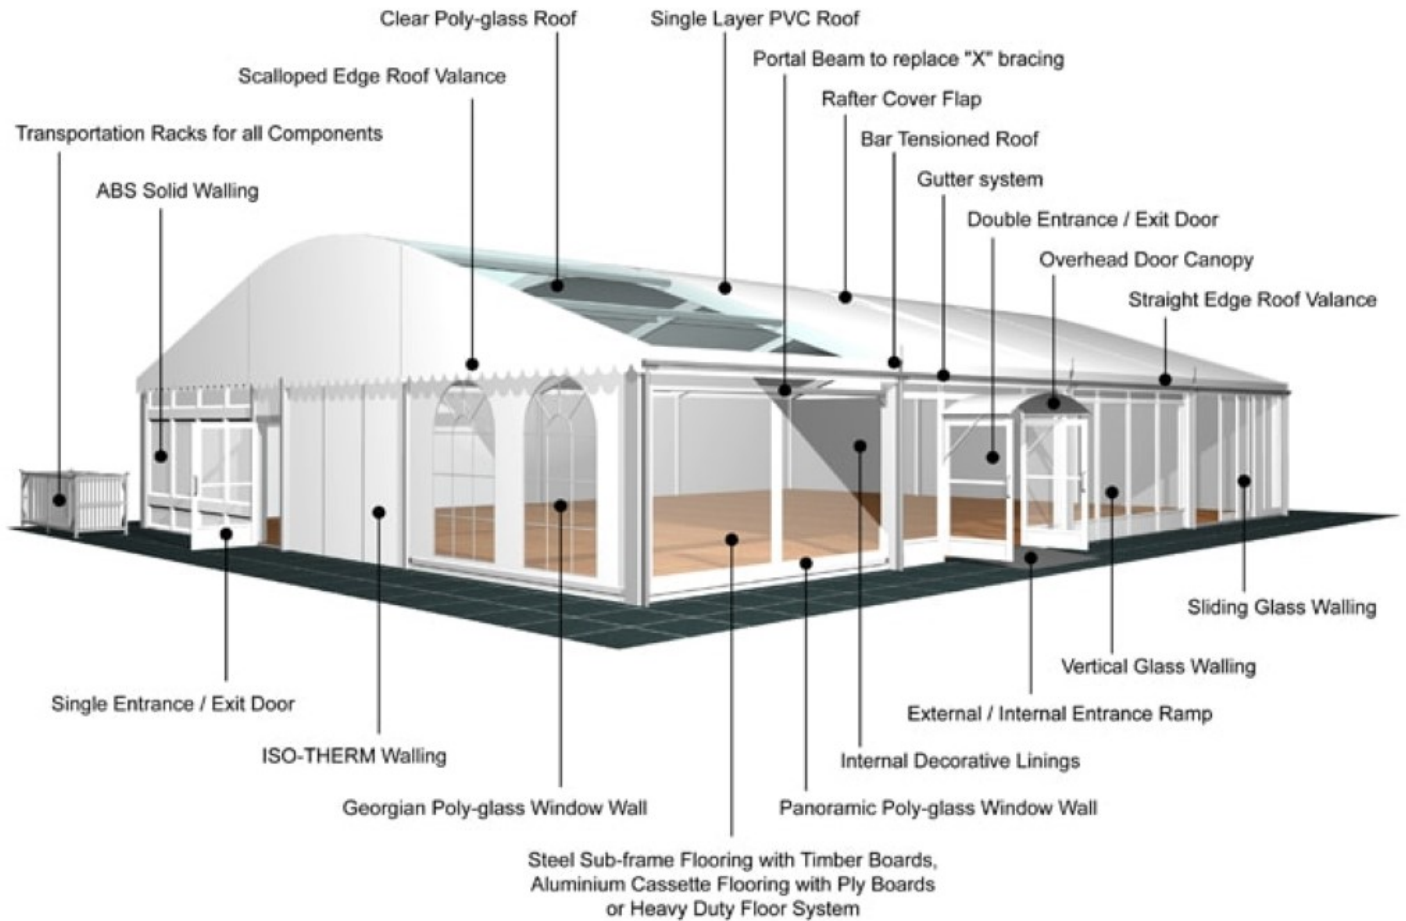

HTS tentiq disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet on this website. All product, product specification and data are subject to change without notice to improve reliability, function or design or otherwise.