

Specifications

Eave height:

4.00m

Span width:

20.00m

Ridge height:

10.15m

Bay distance:

5.00m

Roof pitch:

U

Number of gable uprights:

3 Gable upright (per end)

Longest component:

5.00m

Minimum length:

20.00m

Maximum length:

20.00m

Max allowed wind speed:

102 km/h (0.50kN/m²)

Main profile size:

334/122/8/4.5mm (4-channel)

Eave connection type:

Galvanised steel twin plate

Aluminium type:


European - Hard Pressed Extruded Structural Aluminium


Connecting components:


European - hot dipped, structural grade corrosive resistant galvanised steel

Roof covering type:

Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

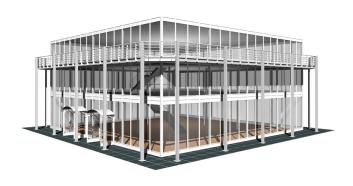






Central America

Greece



Accessories

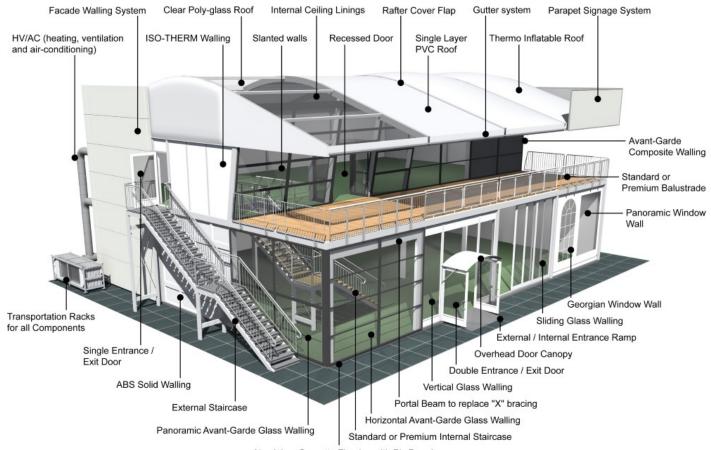

Aluminium Cassette Flooring with Ply Boards or Heavy Duty Floor System

Central America

Greece