

## **Specifications**

**Eave height:** 

4.00m

Span width:

10.00m

Ridge height:

5.53m

**Bay distance:** 

5.00m

Roof pitch:

18°

Longest component:

5.00m

Minimum length:

10.00m

**Maximum length:** 

Unlimited in 5.00m increments

Max allowed wind speed:

102 km/h (0.50kN/m<sup>2</sup>)

Main profile size:

300/122/5/8mm

**Eave connection type:** 

Galvanised steel twin plate

**Aluminium type:** 

European - Hard Pressed Extruded Structural Aluminium


**Connecting components:** 


European - hot dipped, structural grade corrosive resistant galvanised steel

**Roof covering type:** 

Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.








Central America

Greece



## **Accessories**

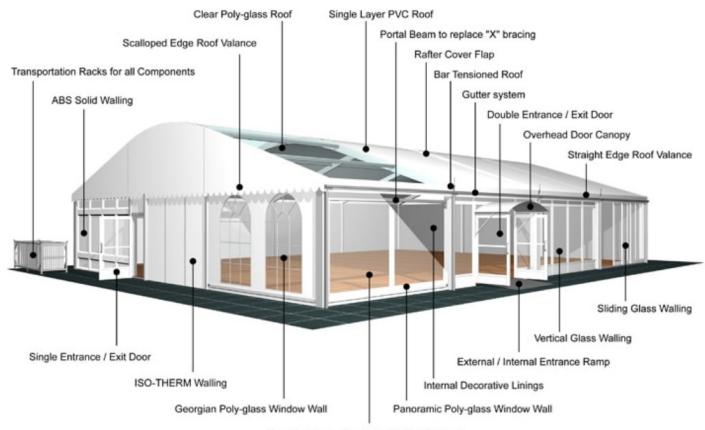

Steel Sub-frame Flooring with Timber Boards, Aluminium Cassette Flooring with Ply Boards or Heavy Duty Floor System

Central America

Greece