

Specifications

Eave height:

4.00m

Span width:

10.00m

Ridge height:

5.53m

Bay distance:

5.00m

Roof pitch:

18°

Number of gable uprights:

1 Gable upright (per end)

Longest component:

5.00m

Minimum length:

10.00m

Maximum length:

Unlimited in 5.00m increments

Max allowed wind speed:

102 km/h (0.50kN/m²)

Main profile size:

300/122/5/8mm

Eave connection type:

Galvanised steel twin plate

Aluminium type:

European - Hard Pressed Extruded Structural Aluminium


Connecting components:


European - hot dipped, structural grade corrosive resistant galvanised steel

Roof covering type:

Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.








Central America

Greece



Accessories

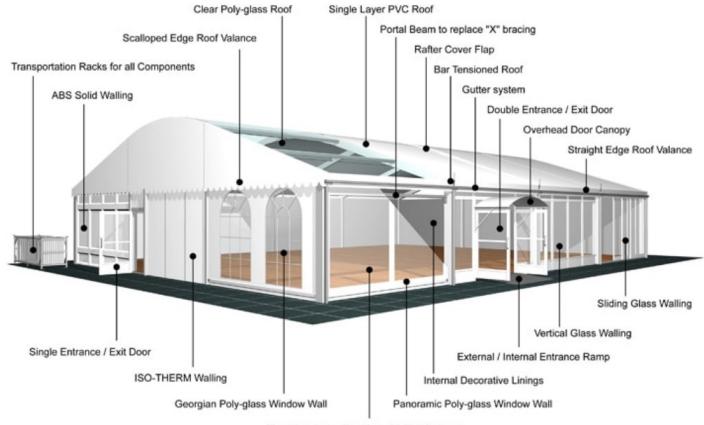

Steel Sub-frame Flooring with Timber Boards, Aluminium Cassette Flooring with Ply Boards or Heavy Duty Floor System

Central America

Greece