

## Specifications

**Eave height:**  
2.30m

**Span width:**  
3.00m

**Peak height:**  
4.86m

**Ridge height:**  
3.00m

**Bay distance:**  
3.00m

**Roof pitch:**  
20° inner roof pitch

**Longest component:**  
2.90m

**Minimum length:**  
3.00m

**Maximum length:**  
Multiple configurations possible

**Max allowed wind speed:**  
80 km/h (0.30kN/m<sup>2</sup>)



**Main profile size:**  
94/48/3mm (3-channel)

**Eave connection type:**  
Internal Galvanised Steel Insert

**Aluminium type:**  
European - Hard Pressed Extruded Structural Aluminium


**Connecting components:**  
European - hot dipped, structural grade corrosive resistant galvanised steel

**Roof covering type:**  
Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

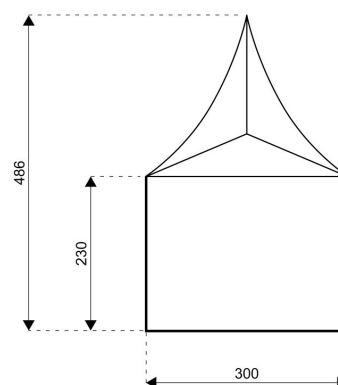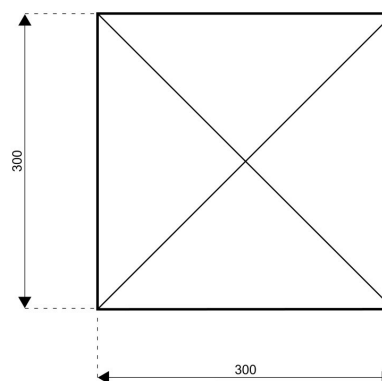

HTS tentiq disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet on this website. All product, product specification and data are subject to change without notice to improve reliability, function or design or otherwise.

## Accessories

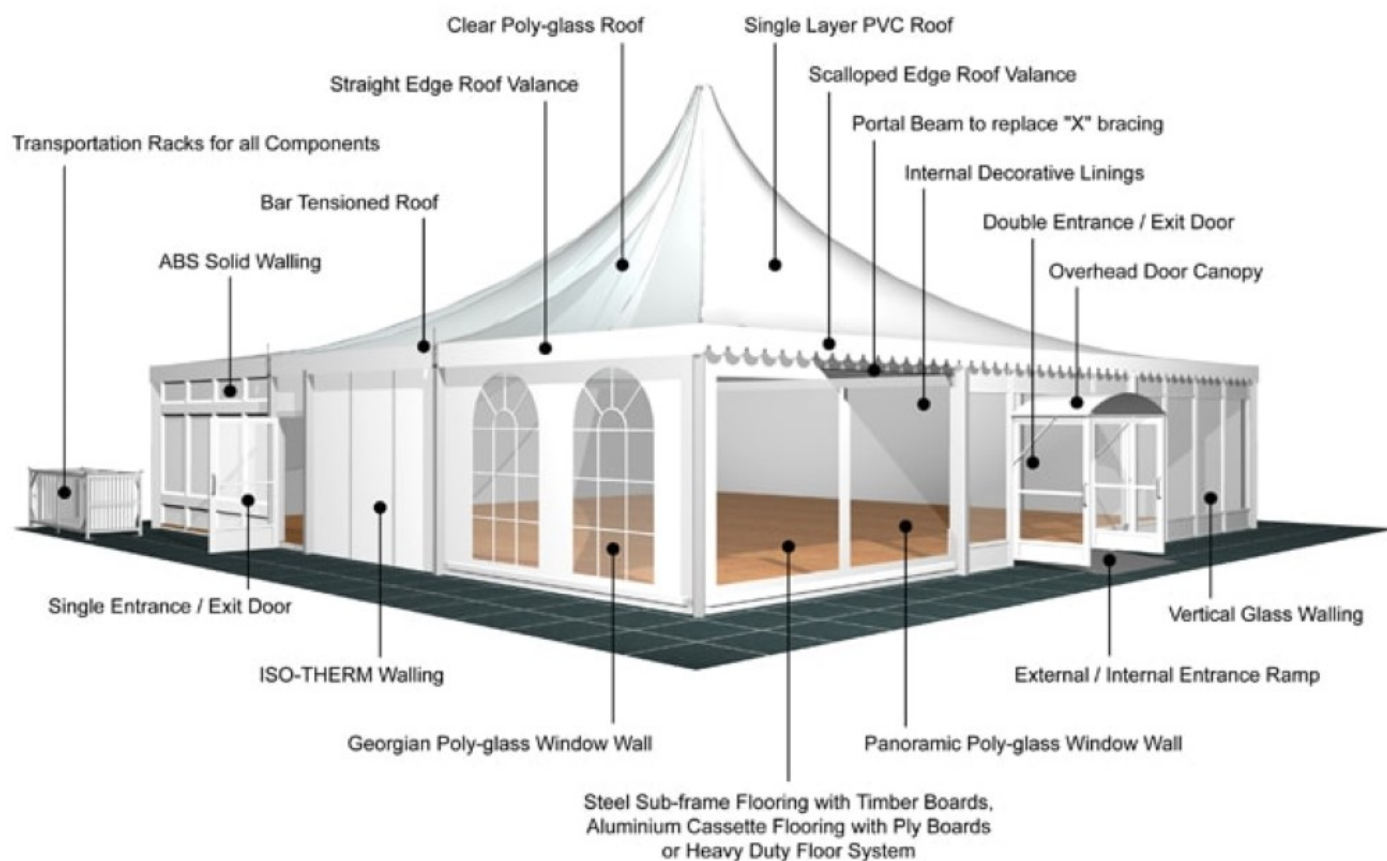

HTS tentiq disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet on this website. All product, product specification and data are subject to change without notice to improve reliability, function or design or otherwise.