

Specifications

Eave height:

3.00m

Span width:

30.00m

Ridge height:

11.71m

Bay distance:

5.00m

Roof pitch:

45° / 15°

Number of gable uprights:

5 Gable upright (per end)

Longest component:

8.97m

Minimum length:

25.00m

Maximum length:

Unlimited in 5.00m increments

Snow loading:

45 kg/m² / 9psf

Max allowed wind speed:

102 km/h (0.50kN/m²)

Main profile size:

300/122/4/6mm

Eave connection type:

Galvanised steel insert

Aluminium type:

European - Hard Pressed Extruded Structural Aluminium


Connecting components:


European - hot dipped, structural grade corrosive resistant galvanised steel

Roof covering type:

Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.








Central America

Greece



Accessories

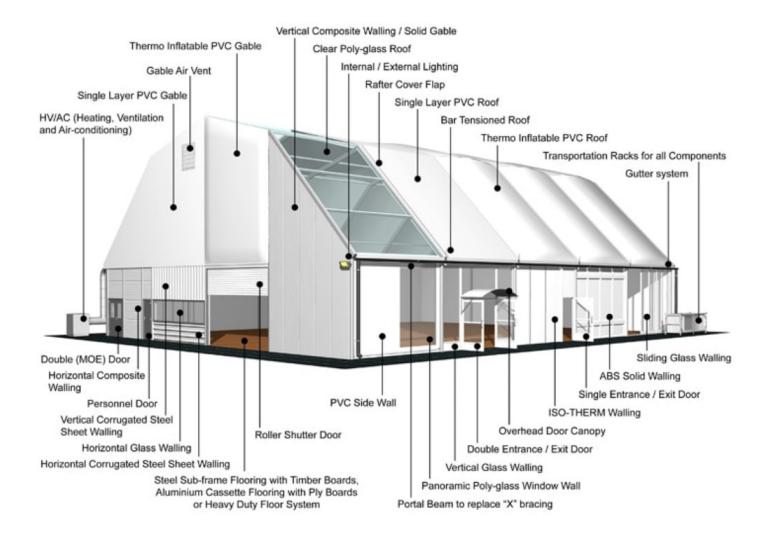

Central America

Greece